

VIP-WECO *CONNECT*

No-dig pipe repair seals

For applications where continuous series installation of repair seals is required. The profile of the VIP WECO *CONNECT* has been designed to seamlessly interlock with the profile of the seal allowing for a watertight linking of VIP-WECO seals.

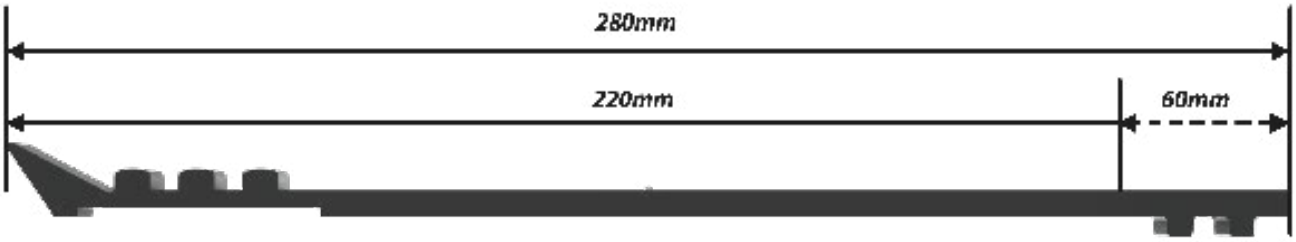

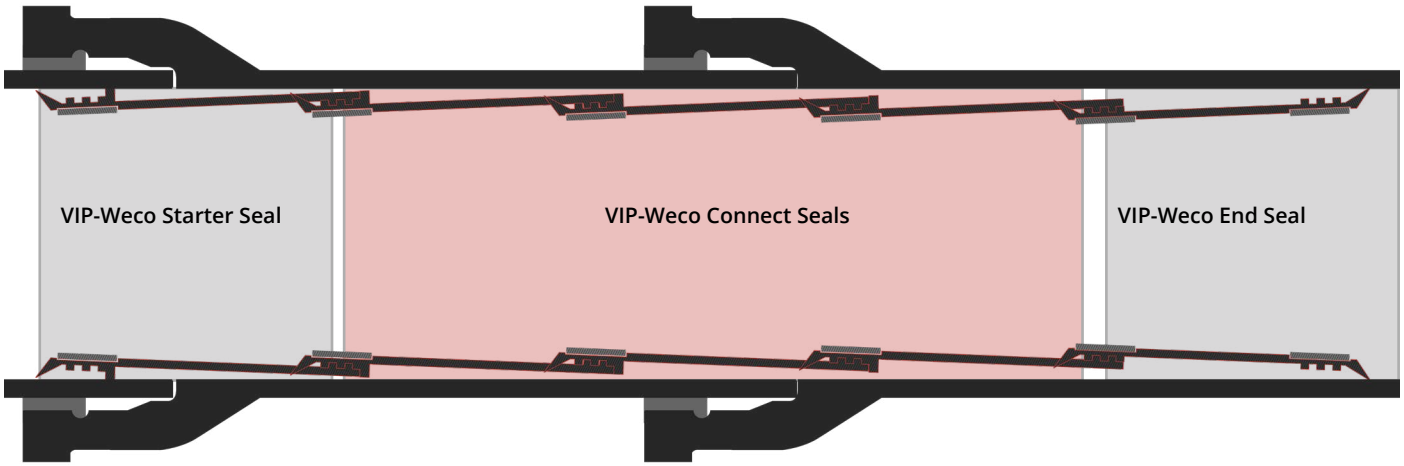

Rubber quality	EPDM for drinking water EPDM for industrial water, waste water (EPDM - ethylene-propylene-diene rubber) NBR for gas, oil, Kerosene, etc (NBR- acrylonitrile-butadiene rubber)	
Shore hardness	70 +/- 5	
Diameter ranges	DN600+	
Pressure ranges up to 20 bar internal pipe pressure		
Sleeve Dimensions	Total width: Web width: Sleeve thickness: Overlap:	280mm 140mm 6mm 220mm
Clamping bands material	Made of stainless steel (e.g 1.4571, 1.4404 or 1.4301 for water, sewage, gas etc.) or carbon steel (e.g FE 590-2 for gas, oil etc.) depending on operating conditions and special customer demands.	
Material tests	EN681-1, WRAS.	

VIP-Polymers Ltd |15 Windover Road | Huntingdon | Cambridgeshire | PE29 7EB | United Kingdom
Tel: +44 (0) 1480 411333 | Email: sales@vip-weco.com | www.vip-polymers.com